

Domino C-Series plus

For high-quality bar codes, text and graphics on outer cases.



Main Features:

High Reliability, Low Maintenance

- Robust design, stainless steel construction
- Integrated print head and user interface a self-contained unit
- Intelligent ink system for reliable ink delivery and maximum Uptime
- Low ink level warning
- Ink bottles can be changed while the printers continue to code

Connectivity

- Centralised control of factory-wide printing
- Central message store, retrieve mode and secure message back-up
- Intuitive and flexible, the network solution runs on Windows® based applications

Options:

- Remote print head option for coding flexibility
- Run up to 4 print heads from the Multi-head base option
- Oil based pigmented inks, supplied in disposable containers, available in black, blue, red and green

Key Benefits:

- C-Series features improve overall equipment effectiveness
- Printing onto blank cases reduces stock holding of outer cases
- Open systems provide non-proprietary label creation and re-use existing IT infrastructure
- Database driven designs ensure correct data is printed and minimise label design creation and maintenance
- Supply chain compliant bar codes



Multi-head configuration



High quality text, graphics and bar codes

Technical Specifications:


Control Units	C1000+	C3000+	C6000+
Print Capabilities			
Number of lines (Standalone mode)	8	8	8
Maximum Print Height	17.5 mm (0.67")	35 mm (1.38")	70 mm (2.76")
Bar code feature	•	•	•
GS1 Bar code Capable	•	•	•
Graphics	•	•	•
Dimensions			
Length	295mm (15.55")	295mm (15.55")	370mm (14.56")
Width	113mm (4.44")	113mm (4.44")	113mm (4.44")
Depth	125mm (4.92")	146mm (5.74")	160mm (6.29")
Ink System Options			
200ml Base (Oil)	•	•	•
2 Litre Base (Oil)	•	•	•
Multi Head Base (Oil)	•	•	•
Options			
Remote Head Variant	X	X	i
Ink Bases			
	200ml Base	2 Litre Base	Multi-head Base
Dimensions			
Height	360 mm (14.17")	507 mm (19.96")	453 mm (17.83")
Width	152 mm (5.98")	228 mm (8.97")	289 mm (11.38")
Depth	108 mm (4.25")	139 mm (5.47")	227 mm (8.94")
Weight (No fluids)	8 Kg (17.64 lbs)	10 Kg (22.04 lbs)	16 Kg (35.27 lbs)
Features – Bottle Out Warning			
		•	•
Options			
Accessory Box	•	•	•
Dual Light Beacon			•

Range Specifications

Construction	Stainless steel
User Interface	Graphical LCD
Maximum Line Speed	80 m/min (263 ft/min) dpi dependant
Electrical	Single phase, 90-240 V @ 50-60 Hz
Operating Temperature	10° – 45° C (41°-95° F)
Humidity (Non-condensing)	10% – 90%
Features	RS232 Capable, Ethernet Capable, Ink out warning
Software	Domino C-Series plus pack

Options

Encoder, Print Head Guide, Floor Mounted Stand, Ink Out Beacon, Conveyor Guide, Interface Assistant, Bar Code Validation Kit

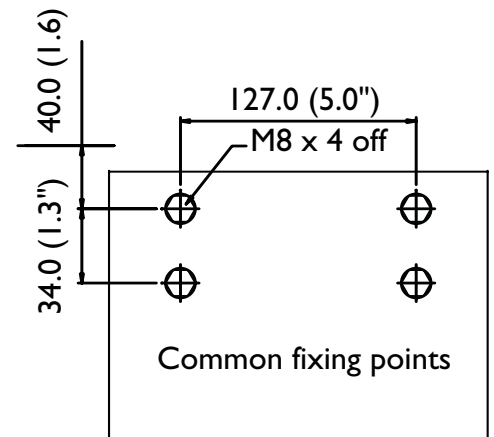

Australia

Domino (Australia) Pty. Ltd.
Unit 12
6 Gladstone Road
Castle Hill
Sydney
NSW 2154
Tel: + 61 2 9894 7833

Canada

Domino Printing
Solutions Inc.
2751 Coventry Road
Oakville
Ontario
L6H 5V9
Tel: + 1 800 387 7972

India

Domino Printech India
Private Limited
167, Udyog Vihar Phase I,
H.S.I.D.C Gurgaon -
122016 Haryana
Tel: + 91 124 500 7406

United Arab Emirates

Domino UK Ltd (Dubai)
PO Box 16984
Jebel Ali
Dubai
Tel: + 971 4 88 35003

United Kingdom

Domino UK Ltd
Bar Hill
Cambridge
CB3 8TU
Tel: + 44 1954 782 551

United States of America

Domino Amjet, Inc.
1290 Lakeside Drive
Gurnee
Illinois 60031
Tel: + 1 800 486 7351



www.domino-printing.com

